

QUICK GUIDE

MOP301 - Moisture in Oil Probe with Modbus RTU


Find this document and further product information on our website at www.epluse.com/mop301.

Electrical Connection



Important note:

The manufacturer cannot be held responsible for personal injuries or damage to property as a result of incorrect handling, installation, wiring, power supply and maintenance of the device.



M12 device plug front view

Pin number	Function
1	Supply voltage 24 V DC class III ⚡ (Europe)/class 2 (North America)
2	RS485 B (D-)
3	GND
4	RS485 A (D+)

Modbus Setup

	Factory settings	Selectable values
Baudrate	9600	9600, 19200, 38400, 57600, 115200
Data bits	8	8
Parity	Even	None, even, odd
Stop bits	1	1, 2
Modbus address	70	1...247

The recommended settings for multiple devices in a Modbus RTU network are 9600, 8, Even, 1. The MOP301 represents 1 unit load in a Modbus network.

Device address, baud rate, parity and stop bits can be set via:

1. PCS10, Product Configuration Software and the appropriate configuration cable HA011018. The PCS10 can be downloaded free of charge from www.epluse.com/pcs10.
2. Modbus protocol in the register 60001 (0x00) and 60002 (0x01).
See Application Note Modbus AN0103 (available at www.epluse.com/mop301).

The serial number in ASCII format is located at read register address 30001-30008 (16 bits per address). The firmware version is located at register address 30009 (bit 15...8 = major release; bit 7...0 = minor release). The sensor name is located at register address 30010.

Communication settings (INTEGER 16 bit)		
Parameter	Register number ¹⁾ [DEC]	Protocol Address ²⁾ [HEX]
Write register: function code 0x06		
Modbus address (Slave ID)	1	0x00
Modbus protocol settings ³⁾	2	0x01

Device information (INTEGER 16 bit)		
Parameter	Register number ¹⁾ [DEC]	Protocol Address ²⁾ [HEX]
Read register: function code 0x03 / 0x04		
Serial number (as ASCII)	1	0x00
Firmware version	9	0x08
Sensor Name	10	0x09

1) Register number starts from 1.

2) Protocol address starts from 0.

3) For Modbus protocol settings see Application Note Modbus AN0103 (available on www.epluse.com/mop301).

Modbus Register Map

FLOAT 32 bit:			
Parameter	Unit	Register number ¹⁾ [Dec]	Register address ²⁾ [HEX]
Read register: function code 0x03 / 0x04			
Water activity aw	-	1135	0x46E
Water content x	ppm	1141	0x474
Temperature T	°C	1003	0x3EA
	°F	1005	0x3EC
Oil parameter A	-	0224	0xDF
Oil parameter B	-	0226	0xE1
Write register: function code 0x10			
Oil parameter A ³⁾	-	0101	0x64
Oil parameter B ³⁾	-	0103	0x66

1) Register number starts from 1

2) Register address starts from 0


3) Examples: Writing Parameter A -2663.30005 decimal: E7 10 00 64 00 02 04 74 CD C5 26 E5 BA

Writing Parameters A and B -1663.30005 and 7.3705 decimal: E7 10 00 64 00 04 08 E9 9A C4 CF DB 23 40 EB AB 61

If two parameters are to be uploaded, it is recommended to write them with a single command.

Installation

i Please note: Continuous oil flow allows for short response time. In such installations, place the sensor with the perforated filter at least partially within the oil.

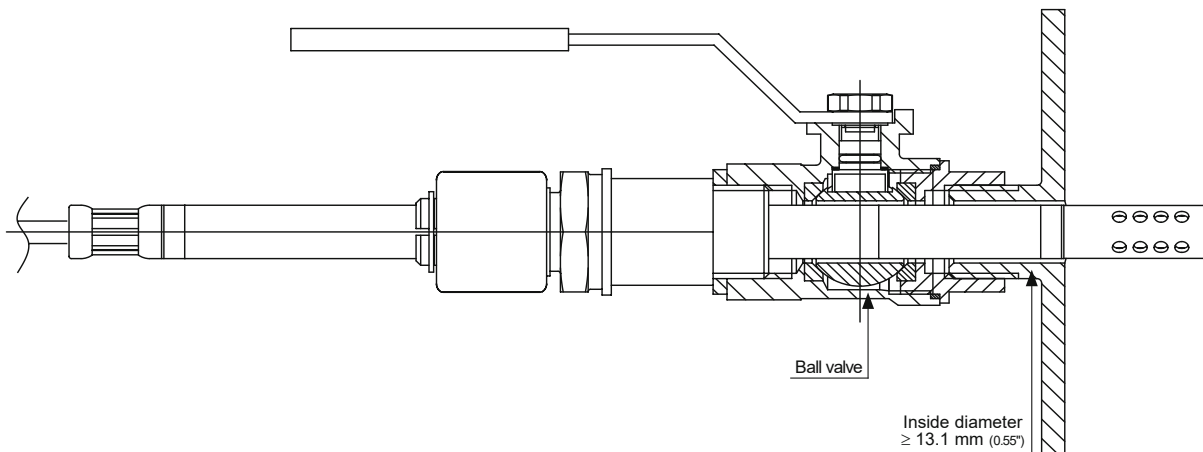

Mounting example with a ball valve (not included in the scope of supply).

For further mounting options, please refer to the user manual on our website: www.epluse.com/mop301

INFORMATION

+43 7235 605 0 / info@epluse.com

E+E Elektronik Ges.m.b.H.
 Langwiesen 7 • 4209 Engerwitzdorf • Austria
 Tel: +43 7235 605-0 • Fax: +43 7235 605-8
info@epluse.com • www.epluse.com

LG Linz Fn 165761 t • VAT No. ATU44043101
 Place of Jurisdiction: 4020 Linz • DVR0962759

