

EE895

Miniature Sensor Module for CO₂ Temperature and Barometric Pressure

The EE895 is the ideal measurement module for sensors and transmitters used in demand controlled ventilation, building automation and process control. Due to the low power consumption, the module is also suitable for battery operated devices such as handhelds, data loggers and wireless transmitters.

CO₂ Measurement Performance

The CO₂ measurement is based on the dual wavelength NDIR principle, which compensates for ageing effects, is highly insensitive to pollution and offers outstanding long term stability. A multiple point CO₂ and T factory adjustment procedure leads to excellent CO₂ measurement accuracy over the entire T working range.

Versatile: 3 in 1


Besides CO₂, the EE895 also measures temperature (T) and barometric pressure (p). The T and p compensation with on-board sensors minimizes the impact of altitude and ambient conditions onto the CO₂ measured data.

Digital Interfaces

The CO₂, T and p measured data is available on the I²C or the UART digital interface.

Configurable

The EE895 can be configured via digital interface. The CO₂ measurement interval can be set according to the application and the power requirements.

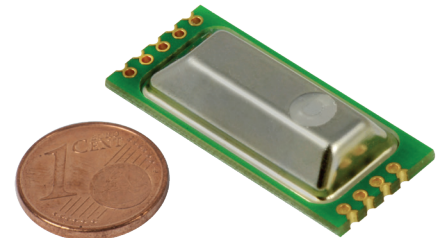

Key features

- Dual wavelength NDIR with autocalibration
- T and p compensation of the CO₂ measurement
- Very low power consumption and peak current
- I²C or UART interface

Technical Data

Measurands

CO₂

Measurement principle	Dual wavelength NDIR (non-dispersive infrared technology)
Working range	0...2000 / 5000 / 10000 ppm
Accuracy at 25 °C and 1013 mbar ¹⁾ (77 °F and 14.69 psi)	0...2000 ppm < ± (50 ppm +2% of the measured value) 0...5000 ppm < ± (50 ppm +3% of the measured value) 0...10000 ppm < ± (100 ppm +5% of the measured value)
T and p compensation of the CO ₂ reading	with on-board sensors
Warm-up time	< 1s
Response time t ₉₀	105 s with measured data averaging (smooth output) 60 s without measured data averaging
Temperature dependency, typ.	± (1 + CO ₂ concentration [ppm] / 1000) ppm/°C (-20...45 °C) (-4...113 °F)
Residual pressure dependency ²⁾	0.014 % of the measured value / mbar (ref. to 1013 mbar)
Calibration interval ³⁾	> 5 years
Sampling interval	from 10 s up to 1 h; user selectable, factory setup = 15s

Pressure

Working range	700...1100 mbar (10.15...15.95 psi)
Accuracy at 25 °C (77 °F), typ.	± 2 mbar (20...80 % RH)
Temperature dependency	± 0.015 mbar/K

Temperature

Working range	-40...60 °C (-40...140 °F)
Accuracy at 25 °C (77 °F), typ.	± 0.5 °C (± 0.9 °F)

1) With data averaging for smooth output signal.

2) The pressure dependency of a device without pressure compensation: 0.14 % of measured value / mbar.

3) Recommended under normal operating conditions in building automation.

General


Digital interface (pin-selectable)

I ² C	up to 100 kbit/s
UART	baud rate 9600, 8 bits, no parity, 1 stop bit

Module control

Enable pin	Continuous operation / single shot mode
Data ready pin	indication of valid data
Supply voltage	3.3 - 5 V DC
Average current consumption	1.5 mA at 15 s sampling interval
Peak current (300 ms)	61 mA at 5 V supply 94 mA at 3.3 V supply


Current profile CO₂ measurement for 15 s sampling interval and 5 V supply

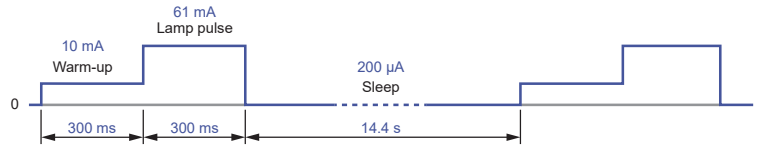


Electrical connection	side plated contacts and solder pads
Working and storage conditions	-40...60 °C (-40...140 °F) 0...95 % RH (not condensating) 700...1100 mbar (10.15...15.95 psi)

Dimensions in mm (inch)

Side view

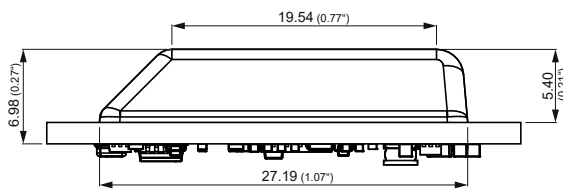

Bottom view

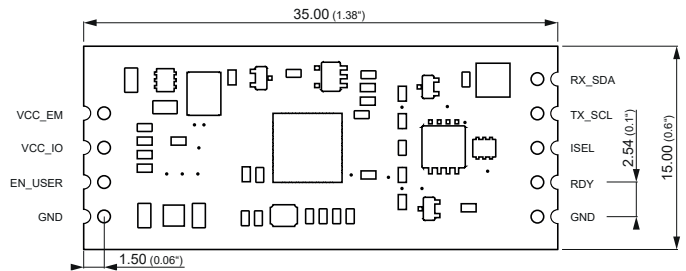


Mounting Examples

Soldering

(minimum total height)




Pluggable

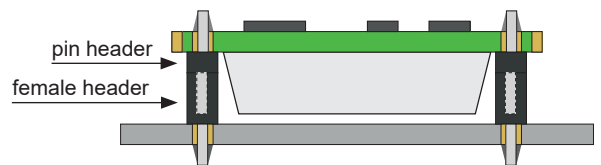

Soldering



Single pin header

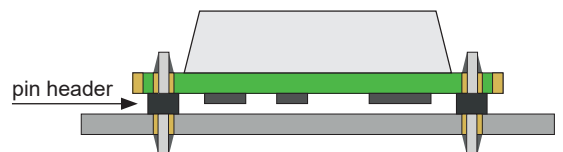

Accessories (see also data sheet "HA011019")

EE895 evaluation board

HA011019

Ordering Guide

		EE895
Model	CO ₂ + T + p	M16
CO ₂ measuring range	0...2000 ppm	HV1
	0...5000 ppm	HV2
	0...10000 ppm	HV3

Order Example

EE895-M16HV1

Model: CO₂ + T + p
 CO₂ measuring range: 0...2000 ppm

Support Literature

www.epluse.com/EE895